

SG-IR808-2K

- 2000m Distance 808nm Infrared Laser Illuminator Module




1. Features

- > Intelligent auto-dimming, Smart match, Hot-swappable.
- > -35°C low temperature cold starting.
- > Fiber Coupling Edge Emitting Laser (EEL).
- > Synchronized zoom with Savgood visible camera.
- > Clear picture and spot boundary.


2. Specification

Model	SG-IR808-2K
Effective Distance	≥2000m
Mode	Fiber Coupling EEL (Edge Emitting Laser)
Wavelength	808±5nm
Input Power	≤40W
Laser Chip Power	14W
Output Light Power	≥12W
Laser Beam Angle	Far Angle 0.8°, Effective Distance>2000m, Beam Spot Diameter < φ28m Near Angle 70°, Effective Distance>40m, Beam Spot Diameter < φ56m
Control Mode	UART_TTL, RS-485, Manual
Communication Interface	RS-485, TTL232, Manual Control
Communication Protocol	Pelco-D (9600bps)
Working Mode	Continues
Service Life	> 20000H
Input Power	DC24V±10%, 1.4A±0.2A
Operation Temperature	-35°C~+55°C
Storage Temperature	-40°C~+85°C
Dimension	171mm*66mm*76mm
Weight	650g

3. Interface Definition:

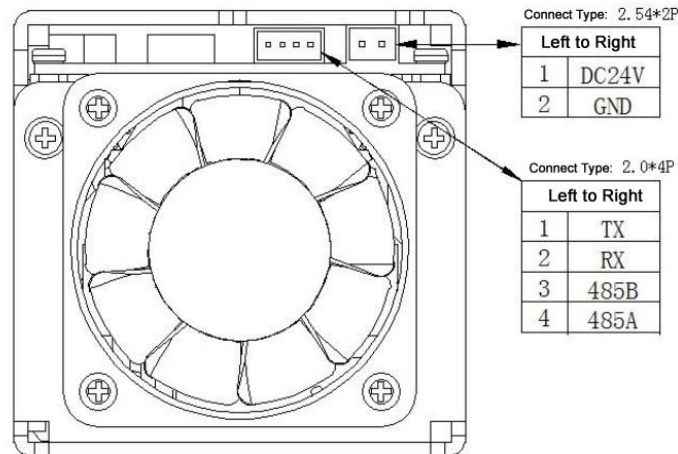

4. Dimension:

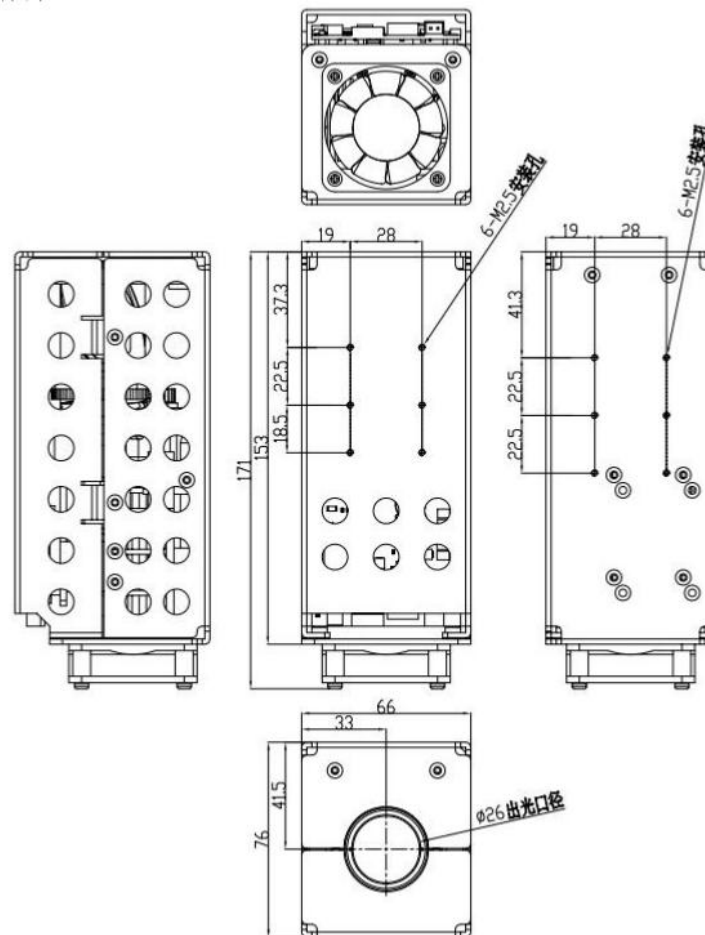

Hangzhou Savgood Technology Co., Ltd.

Rm. 1201, Xincheng Fazhan Building #1, No. 406 Xintiandi Street,
Gongshu District, Hangzhou City, 310022, China
Tel: +86 - (571) 8803 8121
Email: sales@savgood.com
<http://www.savgood.com>
<http://www.savgoodtech.com>

*Design and specifications are subject to change without prior notification.
© 2013 Savgood Technology Co., Ltd.